


AUTO COMBINATION TRANSPORT

G.V.W.R.	20,000#	AXLES	Two 10,000# Dual Wheel Electric Brake (Oil Bath)
G.A.W.R. (EA. AXLE)	10,000#	SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizers
COUPLER	Drop-Leg Style 2-5/16" Ball	TIRE	ST235/85R16 Load Range D
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hooks (2 ea.)	WHEEL	6.00 X 16" Dual – 8 Bolt
JACK	Two 10,000# Drop Leg Jacks (Bolted On)	LIGHTS	D.O.T. Stop, Tail, Turn and Clearance
FRAME	12" X 16# I-Beam	ELEC. PLUG	7-Way RV
CROSSMEMBERS	3" Channel	FINISH (PREP)	Acid Etched w/White Phosphorus, Undercoated w/Panther 813 & Two Coats Primer
RAMPS	2 – Formed 1/8" Diamond Plate 8' Long	FINISH	Painted w/ 2 Coats High Solid <i>Supreme</i> Acrylic Automotive Grade Enamel, and Pinstriped
FLOOR	2 – Formed 1/8" Diamond Plate Runners 25" Wide		

STANDARD FEATURES

- Complete Break-A-Way System w/ Battery & Charger
- Rubber Mounted Sealed Lighting
- 102" Wide
- Spare Mount
- 51 Ft. Load Bed
- Stake Pockets & Rubrail
- Radial Tires
- Modular Sealed Wiring Harness
- 9,000# Winch w/Remote Access at Both Ends of Trailer
- 12V Deep Cycle Battery
- Center Mounted Turn Signals
- 2 - 18" X 18" X 36" Tool Boxes
- Safety Reflective Marker Tape
- 12 Auto Tie Down Ratchet Assemblies
- Electric Brakes On Both Axles
- Center Mounted Ball Tower Track w/5' Ramp
- 4 - Trailer Transport Dual Ball Towers

20AC-51

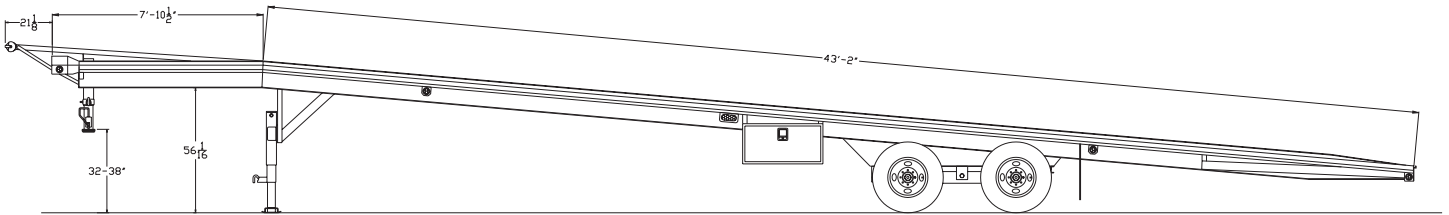

PRICING

MODEL #	WEIGHT	DESCRIPTION
20AC-53	7,790#	102" X 51' Auto / Trailer Transport

OPTIONS

SP	16" Spare Tire & Wheel	
TTD	Transport Tie Down System (Deletes Stake Pockets and Rub Rail)	
KP	King Pin In Lieu of 2-5/16" Coupler	